

1. PLACE THE TWO BRUSHES ONTO BRUSH DRIVE (SIMPLY PUSH ON)



2. FIT SQUEEGEE ASSEMBLY WITH TWO WINGNUTS SUPPLIED



3. FIT SUCTION HOSE (FIRMLY) FROM BASE TO BODY OF MACHINE



4. STAND MACHINE UP IN VERTICAL POSITION



5. TILT MACHINE TO SIDE (OPPOSITE TO SOLUTION INLET) AND RAISE TROLLEY WHEELS



6. REMOVE INLET PLUG AND FILL SOLUTION TANK WITH CAN SUPPLIED



7. PLACE BATTERY INTO MACHINE



8. LOWER SQUEEGEE BY RAISING LOCKING LATCH



9. RAISE LOCKING SLIDE BEFORE TURNING MACHINE ON




10. MACHINE IS READY FOR USE



11. STAND BEHIND CONTROL PANEL



12. TO BEGIN SCRUBBING PROCESS, TURN POWER BUTTON ON

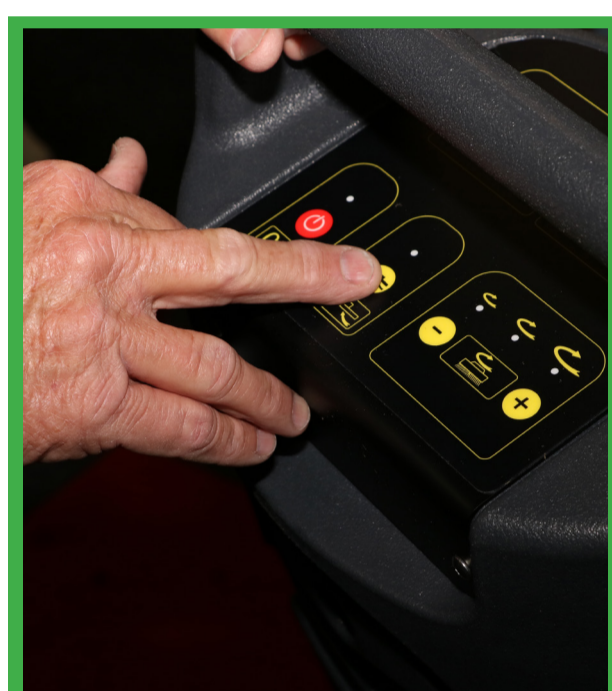

13. TURN VACUUM/SUCTION BUTTON ON



14. SELECT BRUSH SPEED CONTROL, 1, 2 OR 3



15. SELECT WATER FLOW 1, 2 OR 3



16. MAKE SURE MACHINE IS ALWAYS MOVING FORWARD, SQUEEGEE NEEDS TO FOLLOW BRUSH



17. IF YOU WANT TO BRING MACHINE BACK TO YOU, ROTATE HANDLE AND PULL TOWARD YOU.



18. WHEN JOB IS COMPLETE, PRESS RED OFF BUTTON



19. LIFT HANDLE TO UPRIGHT POSITION AND SECURE CONTROL HANDLE BY LOWERING SLIDE



20. LIFT THE SQUEEGEE ASSEMBLY

## GENERAL MAINTENANCE - AFTER EVERY USE



1. EMPTY THE SOLUTION TANK BY USING SPANNER SUPPLIED. TURN ANTI CLOCKWISE TO UNSCREW, REMOVING PLUG AND FILTER



2. CLEAN THE FILTER AND REPLACE BACK INTO THE MACHINE FOLLOWED BY THE PLUG



3. EMPTY THE WASTE RECOVERY TANK BY RELEASING CLIPS ON EACH SIDE.



4. TILT AND LIFT TANK ASSEMBLY OUT



5. REMOVE TOP FILTER, WASH & REPLACE




6. REMOVE DRAIN PLUG TO SAFELY RELEASE WASTE & RINSE TANK (WIPE AWAY ANY EXCESS GRIME)



7. CLEAN EXCESS GRIME IN HANDLE BODY, BEFORE REPLACING WASTE TANK (we recommend Cleanstar Microfibre Cloth)



8. OK TO STORE VERTICALLY

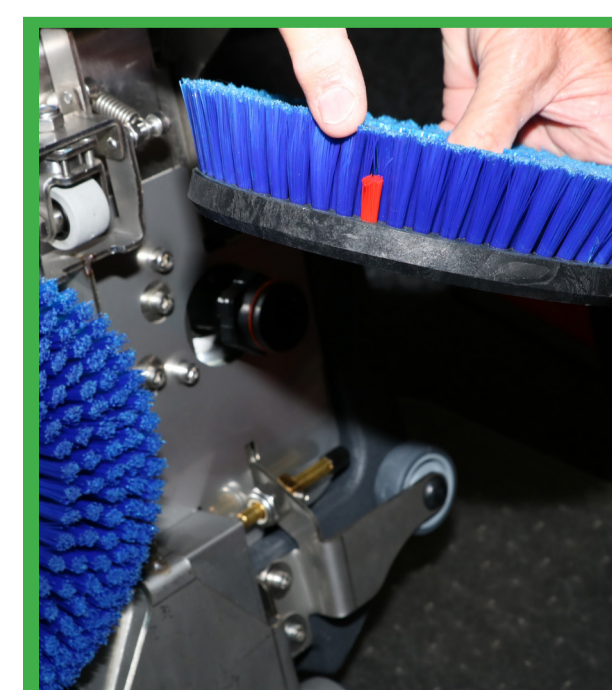

9. WHEN RED INDICATOR LEVEL ON BRUSH IS REACHED, IT NEEDS REPLACING.

10. RECHARGE BATTERY AS PER INSTRUCTION MANUAL (REMOVE BATTERY TO RECHARGE)